

AR49 POLYURETHANE AIR HOSE



Application:

For use with pneumatic air tools such as roofing nailers, sanders and impact wrenches. Light weight, with excellent abrasion resistance and specially designed for optimum kink resistance.

Construction:

Tube - Polyurethane

Reinforcement - High tensile strength yarn

Cover - Lime green polyurethane


Branding- FLEXTRAL AR49-025 1/4" POLYURETHANE AIR HOSE
250 PSI MAX WP

Temperature Range:

-40°C to +74°C (-40°F to +165°F)

Part No.	I.D. Inches	O.D. Inches	Max W.P. PSI@70°F	Weight (lbs./ft.)	Standard Lengths
AR49-025	1/4	0.39	250	0.04	300'
AR49-038	3/8	0.55	250	0.07	300'

AR49 POLYURETHANE AIR HOSE ASSEMBLIES

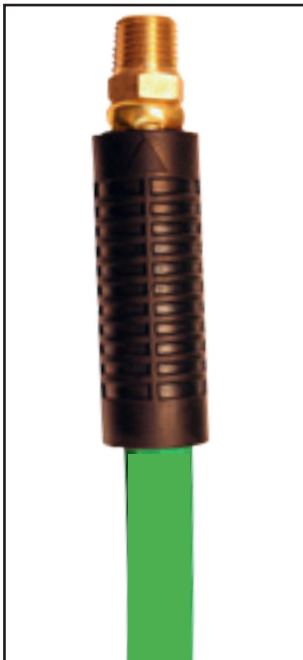

Part No.	Hose Size	Fitting A	Fitting B	Length (ft.)	Attaching Method
AR49-025MM50	1/4	1/4 NPT	1/4 NPT	50	Crimp
AR49-025MM100	1/4	1/4 NPT	1/4 NPT	100	Crimp
AR49-038M2525M50	3/8	1/4 NPT	1/4 NPT	50	Crimp
AR49-038M2525M100	3/8	1/4 NPT	1/4 NPT	100	Crimp

*Call for other lengths and fitting combinations.