


AR60 WIRE REINFORCED AIR

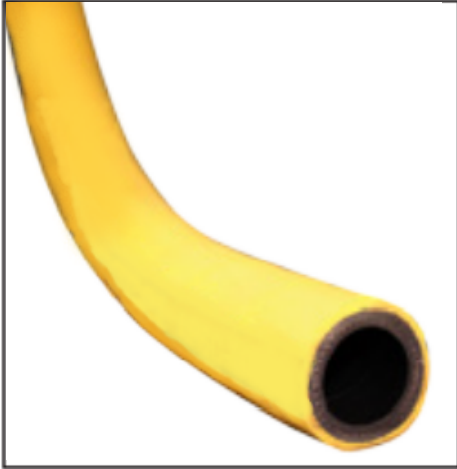

Application:

High pressure air service for mining, construction, rental and industrial use. More resistant to external abuse than textile air hose.

Construction:

Tube - Black; oil mist resistant synthetic rubber

Reinforcement - Layers of high tensile steel wire

Cover - Yellow gouge resistant synthetic rubber with red stripe

Branding - FLEXTRAL AR60-200 2" WIRE REINFORCED AIR
HOSE 600 PSI MAX WP

Temperature Range:

-40°C to +85°C (-40°F to +185°F)

Part No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Weight (lbs / ft)	Standard Lengths
AR60-050	½	0.91	750	0.34	50'/100'
AR60-075	¾	1.14	750	0.44	50'/100'
AR60-100	1	1.44	750	0.65	50'/100'
AR60-125	1¼	1.81	650	1.03	50'/100'
AR60-150	1½	2.05	650	1.40	50'/100'
AR60-200	2	2.60	600	1.88	50'/100'
AR60-250	2½	3.15	500	2.57	50'/100'
AR60-300	3	3.70	450	3.35	50'/100'
AR60-400	4	4.88	400	4.70	50'/100'