

## AR30 MULTI-PURPOSE



### Application:

A premium quality, multi-purpose hose for industrial air service, compressor lines, pneumatic tools, low-pressure spray and many other applications where oil resistance is needed. Non conductive, minimum electrical resistance greater than (1) megohm per inch of hose length at 1000 V DC.

### Construction:

**Tube** - Black nitrile, RMA class A (high oil resistance)

**Reinforcement** - Synthetic yarn

**Cover** - Red NBR blend, RMA class B

**Branding** - FLEXTAL AR30 100 1" (25.4mm) ORCT NON-CONDUCTIVE OIL RESISTANT 300 PSI MAX WP


### Temperature Range:

-29°C to +88°C (-20°F to +190°F)

Part No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Weight lbs / ft	EcoCoils	Reel Lengths
AR30-025	1/4	0.54	300	0.12	300'	300'/600'
AR30-031	5/16	0.64	300	0.16	300'	300'/600'
AR30-038	3/8	0.69	300	0.17	300'	300'/600'
AR30-050	1/2	0.86	300	0.25	300'	300'/600'
AR30-063	5/8	1.02	300	0.33	300'	300'
AR30-075	3/4	1.19	300	0.44	300'	300'/500'
AR30-100	1	1.50	300	0.64	300'	300'/400'
AR30-125	1 1/4	1.80	300	0.85	200'	200'/400'
AR30-150	1 1/2	2.09	300	1.09	200'	200'/400'
AR30-200	2	2.64	300	1.51	200'	200'/400'

\*EcoCoil: Hose packaged in coils, not wound on a wooden or plastic reel.

## AR30 MULTI-PURPOSE ASSEMBLIES

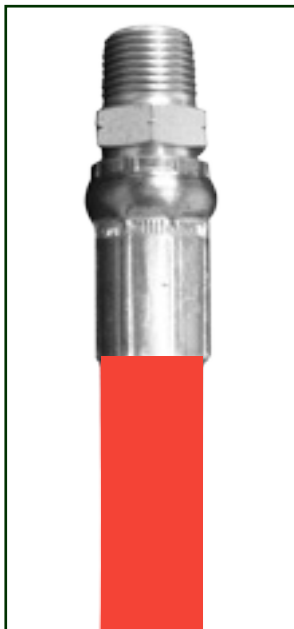

Part No.	Hose Size	Fitting A	Fitting B	Length (ft.)	Attaching Method
AR30-025MM25	1/4	1/4 NPT	1/4 NPT	25	Crimp
AR30-025MM50	1/4	1/4 NPT	1/4 NPT	50	Crimp
AR30-038M2525M25	3/8	1/4 NPT	1/4 NPT	25	Crimp
AR30-038M2525M50	3/8	1/4 NPT	1/4 NPT	50	Crimp
AR30-038M2525M100	3/8	1/4 NPT	1/4 NPT	100	Crimp
AR30-038MM25	3/8	3/8 NPT	3/8 NPT	25	Crimp
AR30-038MM50	3/8	3/8 NPT	3/8 NPT	50	Crimp
AR30-038MM100	3/8	3/8 NPT	3/8 NPT	100	Crimp

\*Call for other lengths and fitting combinations.