

AR65 EXTRA SERVICE 400 AIR



Application:

A premium quality mining, construction, and industrial hose.

Construction:

Tube - Oil mist resistant black synthetic rubber

Reinforcement - Synthetic yarn

Cover - Yellow abrasion resistant rubber with blue stripe


Branding - FLEXTRAL AR65-100 1" EXTRA SERVICE AIR/WATER
400 PSI MAX WP.

Temperature Range:

-35°C to +82°C (-38°F to +180°F)

Part No.	I.D. Inches	O.D. Inches	Max W.P. PSI	Weight (lbs / ft)	Standard Lengths
AR65-050	1/2	0.95	400	0.31	50/100'
AR65-075	3/4	1.26	400	0.41	50/100'
AR65-100	1	1.54	400	0.61	50/100'
AR65-125	1 1/4	1.89	400	0.81	50/100'
AR65-150	1 1/2	2.12	400	0.91	50/100'
AR65-200	2	2.63	400	1.20	50/100'
AR65-300	3	3.70	400	2.37	50/100'
AR65-400	4	4.80	400	3.30	50/100'

AR65 EXTRA SERVICE 400 AIR ASSEMBLIES

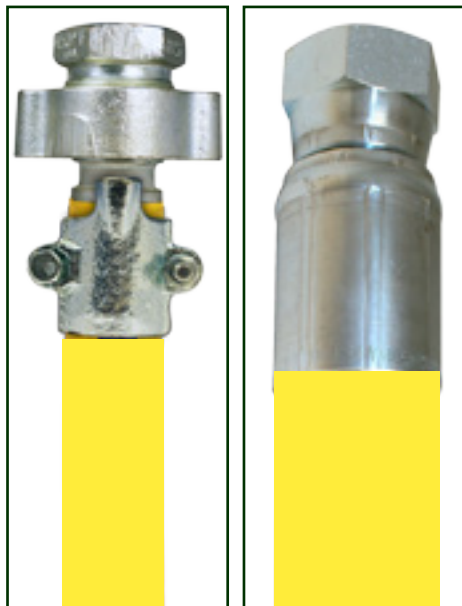

Part No.	Hose Size	Fitting A	Fitting B	Length (ft)	Attaching Method
AR65-050MHMHX50	1/2	Mine Fitting	Mine Fitting	50	Crimp
AR65-100MHMHX50	1	Mine Fitting	Mine Fitting	50	Crimp
AR65-075FFX50	3/4	Female G-J	Female G-J	50	Crimp
AR65-200FFX50	2	Female G-J	Female G-J	50	Crimp
AR65-075FFBC50	3/4	Female G-J	Female G-J	50	Bolt Clamp
AR65-200FFBC50	2	Female G-J	Female G-J	50	Bolt Clamp

*Call for other lengths and fitting combinations.